

Features

- 3WATT SIP PACKAGE
- 2:1 WIDE INPUT VOLTAGES
- EFFICIENCY TO 78%
- 100% BURNED IN
- UL 94V-0 PACKAGE MATERIAL
- CUSTOM SOLUTIONS AVAILABLE
- REGULATED OUTPUT TYPES



3 Watt DC/DC Converter

WIDE INPUT VOLTAGE RANGE
3 WATT DC-DC CONVERTER

Input Specifications

| | |
|---------------------|-----------|
| Input Voltage | :24Vdc |
| Input Voltage Range | :18-36Vdc |

Output Specifications

| | | |
|--------------------------|---------------|-------------------------------------|
| Output Voltage | :±12Vdc | |
| Output Voltage Accuracy | :±3% | @Vout=±11.64~±12.36Vdc@Vin=18-36Vdc |
| Output Current | :±125mA | |
| Efficiency | :78% TYP | |
| Ripple / Noise | :100mVp-p MAX | @20MHz Bandwidth |
| Short Circuit Protection | :Continuous | @Automatics recovery |
| Line Regulation | :±0.5% MAX | @ LL to HL at Full Load |
| Load Regulation | :±0.8% MAX | @0% to 100%FL |


General Specifications

| | | |
|-----------------------------|----------------------|-----------------------------------|
| Operating Temperature Range | :-40°C ~ +85°C | |
| Storage Temperature | :-40°C ~ +125°C | |
| Switching Frequency | :200KHz TYP | |
| Humidity | :95% MAX | |
| Isolation Voltage | :3000Vdc | @Input to Output (60sec/0.5mA) |
| Isolation Resistance | :1000MΩ MIN | @ 500Vdc |
| Cooling | :Free air convection | |
| MTBF | :>1500000 Hours | MIL-HDBK-217F@25°C,Ground Benign. |
| Case Material | :DAP | |
| Weight | :4.5g TYP | |

Remote Control:

| | |
|----------|------------------------------|
| Turn On | : 0 ~ 0.8Vdc or open circuit |
| Turn Off | : 2.5 ~ 12Vdc |

Temperature Derating Graph

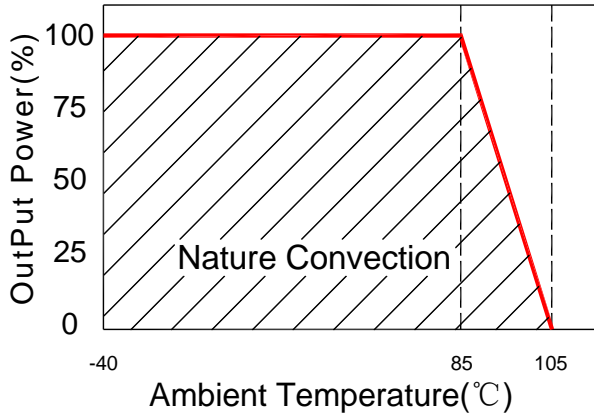


Part Number

27D - 24 D 12 R 3W 3KV
 A B C D E F G


A:Series
 B:Input Voltage
 C: Dual Output
 D: Output Voltage
 E: Regulated(N)
 F: Output Power
 G: Isolation Voltage

Recommended Test Circuit

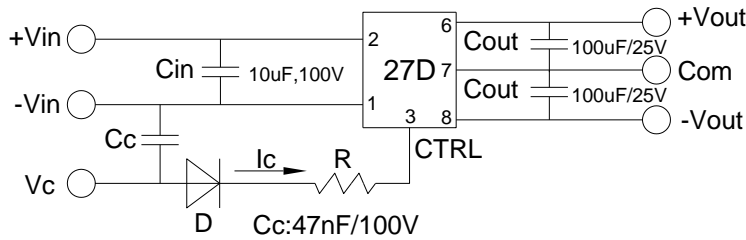

1. When open or high impedance, the converter works well; When this pin is 'high', the converter shut down. It should be note that the input current should be between 5-10mA, exceeding the maximum 20mA will cause permanent damage to the converter.
2. To make sure the product work at perfect operation status with full loading external capacitor is necessary and it is recommended to use high frequency low resistance electrolytic capacitor.

Outline Dimensions

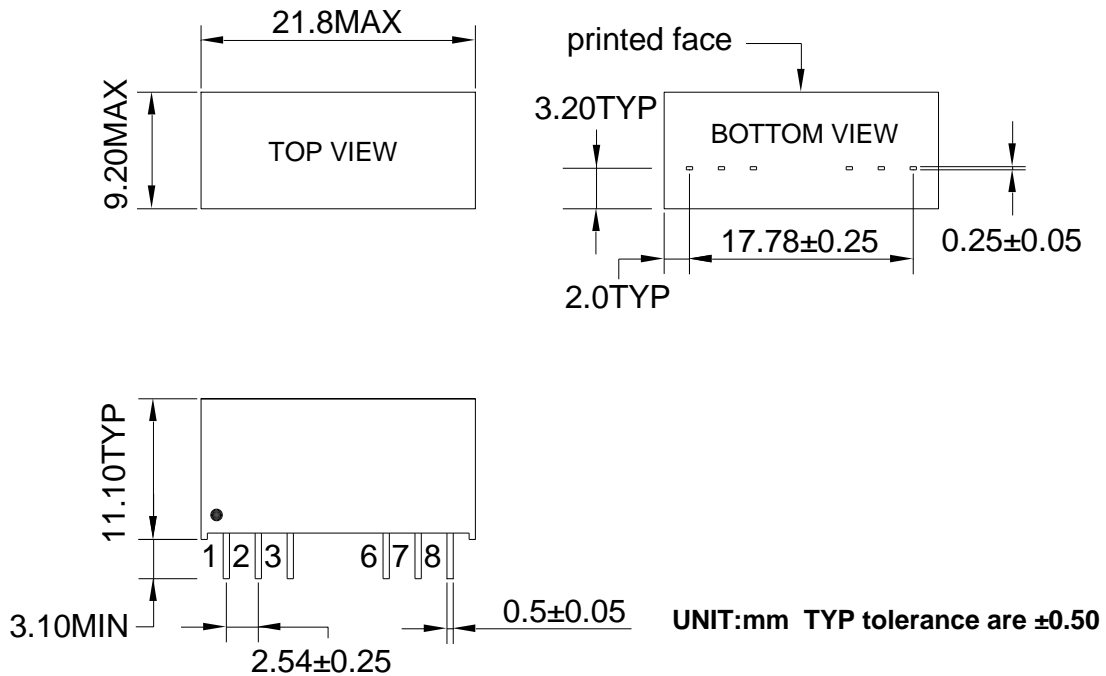


| PIN | 1 | 2 | 3 | 6 | 7 | 8 |
|------|------|------|--|-------|-----|-------|
| DUAL | -Vin | +Vin | Ctrl-Control input can (can be left open) | +Vout | COM | -Vout |

Packing Information:

Weight----- 4.5grams/pcs

TUBE-----22pcs

Weight: 134.5g per tube

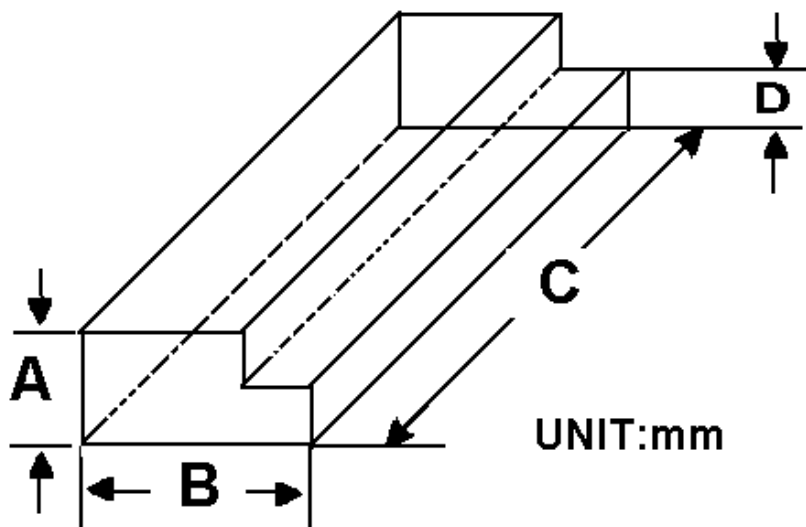

| Size(mm) | | | |
|----------|-------|-----|------|
| A | B | C | D |
| 12.0 | 28.55 | 550 | 6.00 |

Outer carton unit: 1760pcs/80Tube/box

Weight: 11.8kg per carton

