

Features

- 3PIN SIP Package
- Pin-out compatible with LM78XX Linears
- Operating Temperature:-40°C TO +85°C
- Efficiency up to 90%
- Non isolated,no need for heatsinks
- Short circuit protection, Thermal shutdown



**NON-ISOLATED
DC/DC Converter**

Input Specifications

Input Voltage Range	:4.75~36Vdc
Input current	:2mA TYP

Output Specifications

Output Voltage	:3.3Vdc	
Output Voltage Range	:4%	@Vout=3.168~3.432Vdc @Vin=4.75~36Vdc
Output Current	:1000mA	
Efficiency	:90% TYP @Min Vin	
	:81% TYP @Max Vin	
Ripple / Noise	:75mVp-p MAX	@20MHz Bandwidth
Short Circuit Protection	:Continuous	@auto-recovery
Line Regulation	:±0.5% MAX	@LL to HL at Full Load
Load Regulation	:±0.6% MAX	@10% to 100% load

General Specifications

Operating Temperature Range	: -40°C ~ +85°C (with derating)	
Storage Temperature	: -55°C ~ +125°C	
Switching Frequency	: 400KHz	
Humidity	: 95% MAX	
Cooling	: Natural Convection	@20LFM
MTBF	: >7395000 Hours	MIL-HDBK-217F@25°C,Ground Benign.
Weight	: 4.0g TYP	
Conducted Emission	: EN55022 Class A	
Radiated Emission	: EN55022 Class A	

Temperature Derating Graph

Operating Temperature (°C)	Output Power (%)
-40	100
70	100
100	0

Part Number

01DC2 – 3R3 – 1AL

A B C

A: Series

B: Output Voltage

C: Output Current

Outline Dimensions

Single

Vin	Cin	Single Vout	Cout
24Vdc	10μF/50V	3.3Vdc	22μF/10V

To make sure the product work at perfect operation status with full loading external capacitor is necessary and it is recommended to use high frequency low resistance electrolytic capacitor

Printed Face

17.5 ± 0.5

11.5

5.08

1 2 3

1.5(max.)

4(min.)

8.5

11.5

5.08

1 2 3


Unit : mm

Tolerance : XX.X ± 0.5 , XX.XX ± 0.25

PIN Assignment

PIN	1	2	3
FUNCTION	+Vin	GND	+Vout

Packing Formation

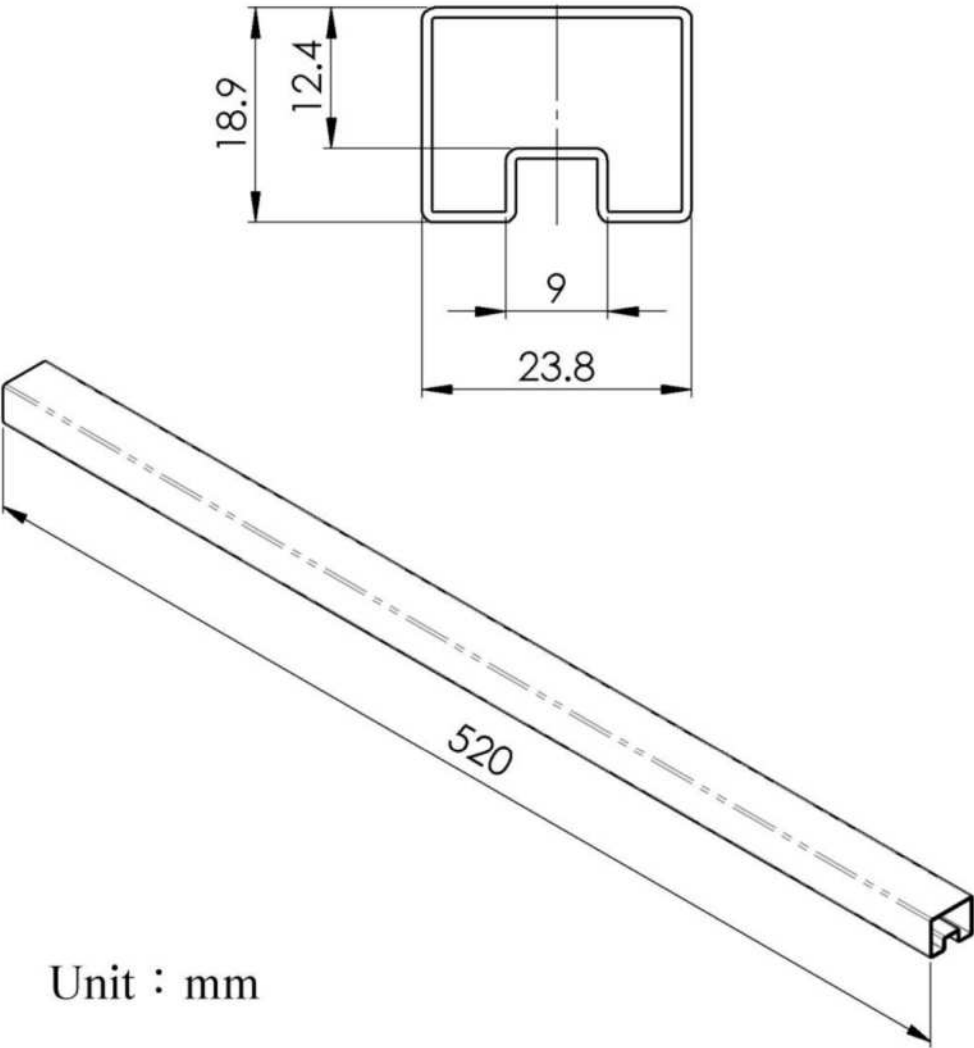

Unit : mm

Weight	: 4.0 grams/pcs
TUBE	: 42 pcs