

Features

- 20 WATT DIL PACKAGE
- 8:1 WIDE INPUT VOLTAGES
- EFFICIENCY UP TO 90%
- PI INPUT FILTER
- 100% BURNED IN
- UL 94V-0 PACKAGE MATERIAL
- CUSTOMIZED SOLUTIONS AVAILABLE
- REGULATED OUTPUT TYPE



**20 Watt DC/DC
Converter**

WIDE INPUT VOLTAGE RANGE

20 WATT DC-DC CONVERTER

**Input Specifications**

Input Voltage	:36Vdc	
Input Voltage Range	:9~75Vdc	@100 ms Max.
Input Surge Voltage	:100Vdc Max.	
Start-up Voltage	:9Vdc Max.	
Under Voltage Shutdown	:7.5Vdc Typ.	@Power-up & Remote
Start-up Time (constant resistive load)	:30ms Typ.	
Input Filter	:Internal PI Type	@Positive logic
Remote ON/OFF	:Open or 3.5~12Vdc(DC/DC ON) :Short or 0~1.2Vdc(DC/DC OFF) :-0.5 ~ +0.5 mA :3 mA Typ.	(Refer to -Vin PIN) @Input current of Remote ON/OFF pin @Remote off input current

Output Specifications


Output Voltage	:5Vdc	
Output Voltage Accuracy	:±2%	@4.9~5.1Vdc @Vin=9~75V
Output Current	:4000mA	
Efficiency	:90% Typ.	@Vin=36Vdc
Ripple / Noise	:100mVp-p Max.	@20MHz Bandwidth , with 1uF*1 MLCC
Output Power Protection	:190% Max.	@Hiccup, auto-recovery
Over Voltage Protection	:6.2Vdc Typ.	
Short Circuit Protection	:Continuous	@Hiccup, auto-recovery
Line Regulation	:±0.2% Max.	@Full Load
Load Regulation	:±0.5% Max.	@0% TO 100% load
Voltage adjustability	:±10% Max.	
Temperature coefficient	:±0.02%/°C Max.	
Transient response setting time	:350us Typ.	@25% load step change
Transient response Deviation	:±5% Max.	@25% load step change

General Specifications

Operating Temperature Range	: -40 ~ +77.2°C	Without Derating@ Nominal Vin
Operating Case Temperature	: +105°C Max.	
Over Temperature Protection	: +120°C Typ.	@Case Temperature
Storage Temperature	: -55°C ~ +125°C	
Switching Frequency	: 235KHz Typ.	
Humidity	: 95% Max	@Non Condensing
Isolation Voltage	: 2250VDC	@Input To Output
	: 1000VDC	@Input(Output) To Case
Isolation Resistance	: 1000M Ω Min	@500Vdc
Isolation Capacitance	: 2200pF Max	
Cooling	: Natural Convection	@20LFM
Case Material	: Copper	
Potting material	: Silicone (UL94-V0)	
Weight	: 35g Typ.	

Temperature Derating Graph


Part Number

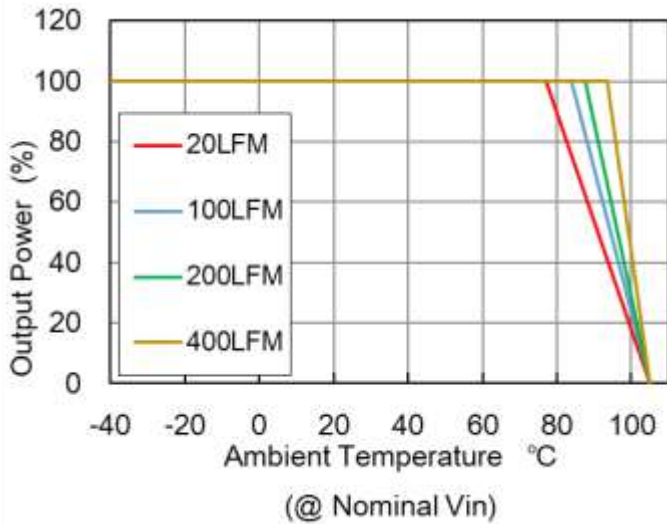

YNC20- 36 S 05
A B C D

A: Series
B: Input Voltage
C: Single Output
D: Output Voltage

Outline Dimensions

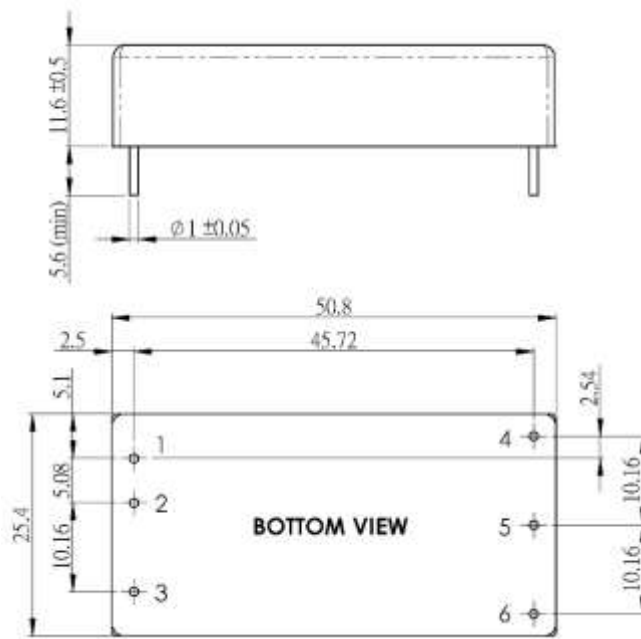

Unit: mm

Tolerance: XX.X ±0.5; XX.XX ±0.25

PIN Assignment

PIN	1	2	3	4	5	6
FUNCTION	+Vin	-Vin	Remote On/Off	+Vout	-Vout	Trim